Outline Dimension

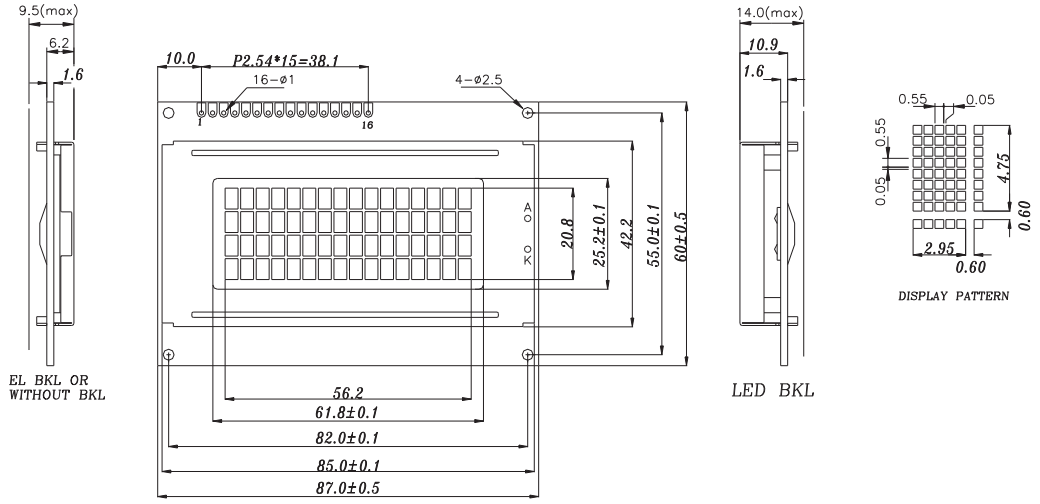

Feature

1. *5X8 dots with cursor*
2. *Built-in controller (KS0066U or Equivalent)*
3. *+5V power supply(Also available for +3.0V)*
4. *1/16 duty cycle*
5. *BKL to be driven by pin1,pin2,or pin15,pin16,or A,K*
6. *N.V.optional*

Interface pin connections

PIN NO	Symbol	Function
1	VSS	GND
2	VDD	+5V
3	V0	Contrast adjustment
4	RS	H/L Register select signal
5	R/W	H/L Read/Write signal
6	E	H/L Enable signal
7	DB0	H/L Data bus line
8	DB1	H/L Data bus line
9	DB2	H/L Data bus line
10	DB3	H/L Data bus line
11	DB4	H/L Data bus line
12	DB5	H/L Data bus line
13	DB6	H/L Data bus line
14	DB7	H/L Data bus line
15	A	+4.2V for BKL
16	K	Power supply for BKL(0V)

Mechanical Data

Item	Standard	Unit
Module dimension	*87.0x60.0*	*mm*
Viewing area	*61.8x25.2*	*mm*
Dot size	*0.55x0.55*	*mm*
Character size	*2.95x4.75*	*mm*

Absolute Maximum Rating

Item	Symbol	Standard			Unit
		Min	Typ	Max	
Power supply	*VDD-VSS*	-0.3	--------	5.5	V
Input voltage	*VI*	-0.3	--------	VDD	

Electronical characteristics

Item	Symbol	Condition	Standard			Unit
			Min	Typ	Max	
Input voltage	*VDD*	+5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	5.3	V
Supply current	*IDD*	VDD=5V	------	2	5	mA
Recommended LCD driving voltage for normal temp version module	VDD-V0	-20ºC	------	------	------	V
		0 ºC	4.7	5.0	5.5	
		25ºC	4.3	4.5	4.7	
		50ºC	4.1	4.3	4.5	
		70ºC	------	-------	------	
LED forward voltage	*VF*	25ºC	------	4.2	4.6	V
LED forward current	*IF*	25ºC	------	220	-----	mA
EL power supply current	IEL	VEL=110V AC 400Hz	-----	-------	------	mA

Display character address code:

Display position

	1	*2*	*3*	*4*	*5*	*6*	*7*	*8*	*9*	*10*	*11*	*12*	*13*	*14*	*15*	*16*	
DDRAM address	*00*	*01*	*02*	---	---	---	---	---	---								*0FH*
DDRAM address	*40*	*41*	*42*	---	---	---	---	---	---								*4FH*
DDRAM address	*10*	*11*	*12*	---	---	---	---	---	---								*1FH*
DDRAM address	*50*	*51*	*52*	---	---	---	---	---	---								*5FH*